

## PC-VGAD



VGA active cooler consisting of aluminum and crystal Primecooler fan is suitable for such VGA cards, where the pushpin distance is 54.8 mm. The fan built in is the low noise version of 40 mm fan. The package includes thermal compound for even better heat transfer.

### Fan

PRIMECOOLER 40 mm fan assembled is chosen for the silent operation with good air flow. The basement surrounds the fan for powerful heat dissipation.

### Easy installation

The PRIMECOOLER PC-VGAD cooler is constructed for easy installation process by two pushpins. The cooler is connected and supplied by power through standard 2-wire and 2-pin cable.

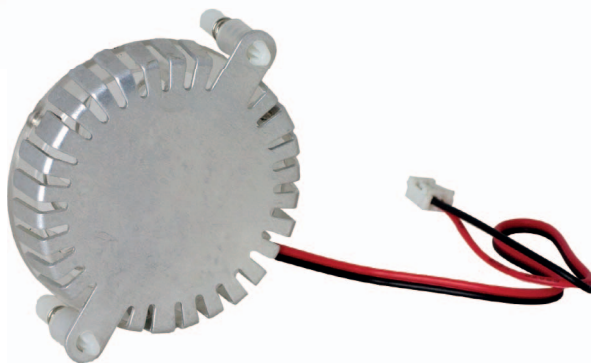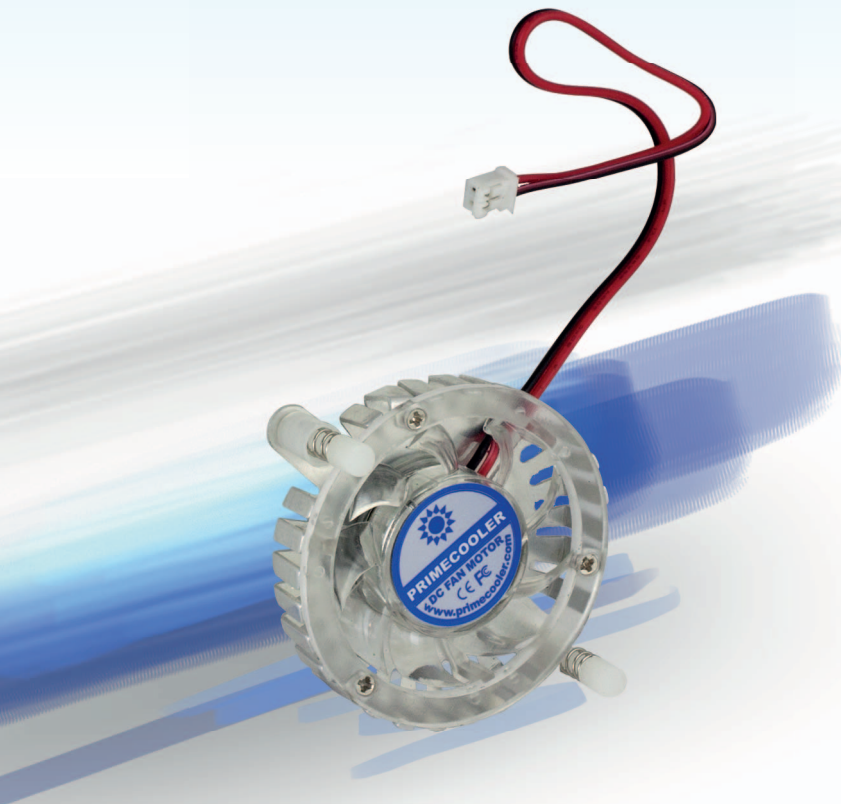

### Specification

Dimension	47 × 47 × 10 mm
Pushpin Distance	54.8 mm
Material	Aluminum basement
Color	Silver
Fan	40 mm
Fan Speed	5000 ± 10% rpm
Fan Bearing	Sleeve
Max. Airflow	10.5 CFM
Noise Level	21 dB/A
Package Includes	Thermal compound
Shipping details	250 pcs/carton
Shipping weight	12.6 kg/carton